

移动式架构体压滤机 Movable type framework filter press



鼓膜100公斤高压滤机 High pressure filter press with 10Mpa squeezing pressure


制糖专用节能高效压滤机 Energy saving high efficient filter press for sugar industry

景津附属设备 ingjin Accessory Equipment






油田泥浆处理系统 Oil field slurry treatment system

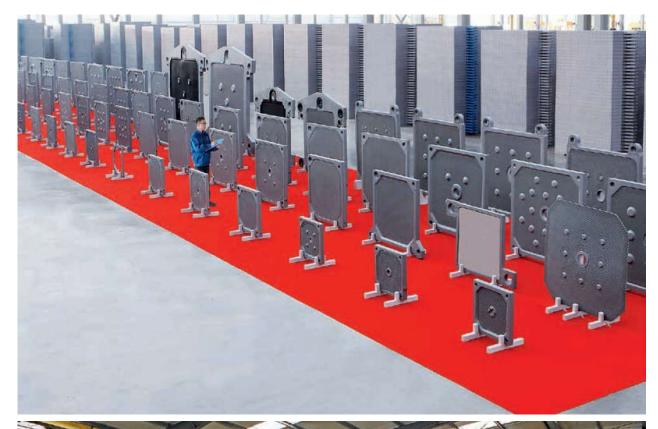



滤板是压滤机的核心过滤元件。滤板材质、形式以及质量的不同,会对整机的过滤性能产生不同的影响。其进料径,滤点的分布(过滤通道)及其出水通道,对不同物料有不同的设计方案。"景津"牌滤板材质为进口TPE弹性体及高强度聚丙烯,使滤板既有橡胶滤板的弹性,又有聚丙烯滤板的韧性、刚性,使滤板压紧时密封性能更好。景津滤板各项技术指标均按欧盟标准生产。"景津"牌聚丙烯高压隔膜滤板最大鼓膜压力达4.0Mpa,代表了世界最高水平。

Filter plate is the core part of the filter press. Different materials, models and qualities of filter plate will have different affects on the filteration performance of the whole machine. Its feeding hole, filtering point distribution (filtering channel) and water discharging channels have different designs according to different materials. "Jingjin" filter plate adopts imported TPE elastomer and high intensity PP to make the filter plate not only has the flexibility of the rubber plate, but also has the tenacity and rigidity of the polypropylene plate, ensuring the airtightness of the filter plate during the progress of pressing. All technical indicators of Jingjin filter plate strictly comply with EU standard. The maximum membrane inflation pressure of "Jingjin" high pressure PP membrane filter plates can be up to 4.0Mpa, representing the most advanced level around the world.

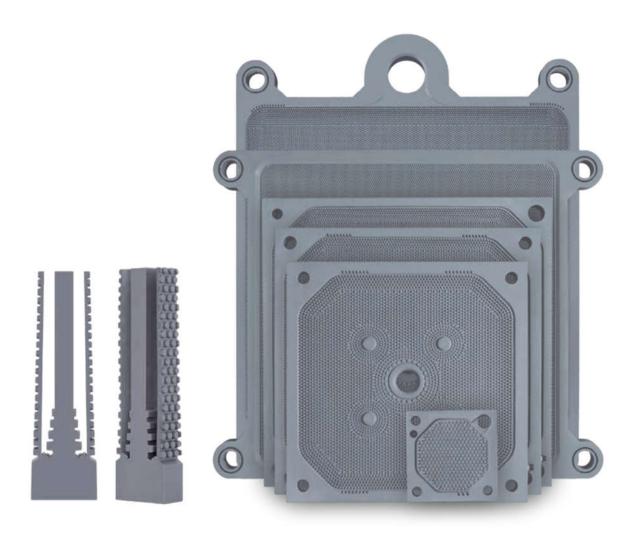







1500型聚丙烯高压隔膜外排液滤板